

CROWNTYRE

CROWNTYRE INDUSTRIAL

MAIL SALES@CROWNTYRE.COM | **TEL** 0086 532 8090 3637 | **FAX** 0086 532 8667 5300

VISIT 27F INTL FINANCE CENTER, 59 MIDDLE HONG KONG ROAD, QINGDAO CHINA 266071

ROOM 111, 100 PALL MALL, ST JAMES, LONDON SW1Y 5NQ, UNITED KINGDOM

CROWNTYRE.COM

CROWNTYRE

CROWNTYREOFFICIAL

CROWNTYREOFFICIAL



PASSENGER CAR

PORTFOLIO LINE UP

Gremax

ENJOY THE MAXIMUM PLEASURE OF ULTIMATE GRIP

Unleash your driving adventure with Gremax



73 **GLOBAL TRADEMARKS**

GREMAX® brand is legally registered in over 126 countries across six continents, providing legal certainty as well as driving marketing synergies for distribution partners.

17 **QUALIFICATIONS**

GREMAX® products conform to IATF-16949:2016 standards and meets international standard requirements of each market: CCC, E-Mark, DOT, INMETRO, NOM, LATU, GSO/GCC, SASO, SONCAP, SNI, BIS, REACH Compliance, Smartway, S.G.S and Smithers.

30 **DESIGN PATENTS**

GREMAX® products are at the forefront of design and innovation with in-house R&D teams always looking to push the boundaries of technical capabilities. Designs including tread pattern, sidewall composition, rubber compound are legally protected.

500 **DISTRIBUTION PARTNERS**

GREMAX® products have established its global presence through more than 500 distribution partners worldwide, along with overseas subsidiaries operating in Singapore, Dubai, United States and Europe.

GROUNDWORK OF SUCCESS

MANUFACTURING PLANT & FACILITIES

SUPPLIERS
RAW MATERIALS

ExxonMobil
Synthetic Rubber

CABOT
Carbon Black

BEKAERT
Steel Cord

VMI GROUP
Building Machine

Mold


VMI Building Machine


Curing Machine


Mixing Machine


Warehouse

Ahead of the Curve!

CROWNTYRE , cornerstone of Crown International Corporation's continued growth, is one of the leading players in the global tyre industry since its foundation in 2006. A clear strategy, an international network, a comprehensive product range and a customer-oriented service have been the key to the company's decade long success.

As a professional tyre manufacturer and trusted international import and export specialist based out of China, Crowntyre manages to maintain its growth along with a strong domestic retail performance and global supply chain network development, establishing global presence across over 126 countries through more than 500 distribution partners worldwide.

Credibility

Our brands deliver promising quality with noticeable, relevant benefit in the eyes of consumers, strongly supported by certificates issued by quality testing authorities and environmental organisations.

Viability

In addition to being legally protected against trademark conflicts, various means of promotional support help to deliver a consistent, coherent overall image that is highly personalised and intuitively comprehensible.


Sustainability

Not only complying to the existing laws and regulations, Crowntyre is future oriented and continues to stay ahead of the latest market trend by developing clean, energy efficient and eco-friendly green materials and technologies.

Community

Powered by the global distribution channel and partners worldwide, Crowntyre brands are building up awareness as well received and trusted through word of mouth and positive market feedbacks.

Global Presence & Strategic Planning

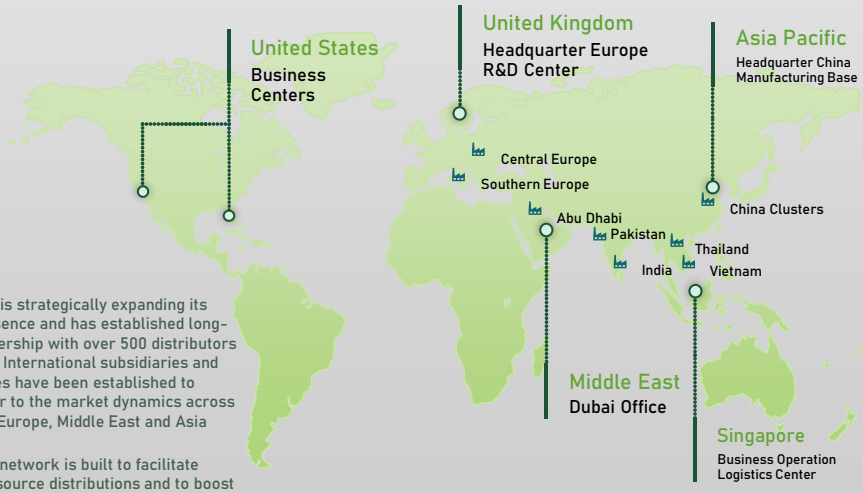

Crowntyre is strategically expanding its global presence and has established long-term partnership with over 500 distributors worldwide. International subsidiaries and sales offices have been established to better tailor to the market dynamics across Americas, Europe, Middle East and Asia Pacific.

This global network is built to facilitate efficient resource distributions and to boost local market performances.



CAPTURAR CF19

P8



CAPTURAR CS01

P10



CAPTURAR CF26

P11

ULTRA-HIGH PERFORMANCE



CAPTURAR CF18

P6



CAPTURAR CR07

P7



CAPTURAR CF1

P12

HIGH PERFORMANCE
TOP SELLERS



CAPTURAR CF8

P14



CAPTURAR CF3

P15



CAPTURAR CF2

P16

HIGH PERFORMANCE
TOURING SERIES



MAX 5800

P17



MAX HT

P20



CAPTURAR CF28

P18

4x4 HIGHWAY TERRAIN



MAX AT

P21



MAX AT2

COMING SOON



TERRA BREAKER A/T

P22

4x4
ALL TERRAIN



CAPTURAR CF5

P19



TERRA BREAKER M/T

COMING SOON

4x4
MUD TERRAIN

Light Commercial
PICK-UP VAN
LIGHT TRUCK



CAPTURAR CF12

P24



CAPTURAR CF20

P25



MAX TRANSP

P26



GM608 HP

P28



GM605 UHP

P29



GM607 SUV

P30



GS601 Studdable

P31

WINTER APPLICATION
SNOW SERIES

WINTER APPLICATION
ALL-SEASON SERIES



GM701 HP

P32



GM702 Van

P34




Improved Control Technology


Light-weight design helps to decrease fuel consumption and heat generation.



Multiple patter pitch helps to decrease the noise level.



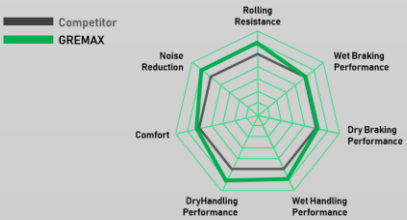

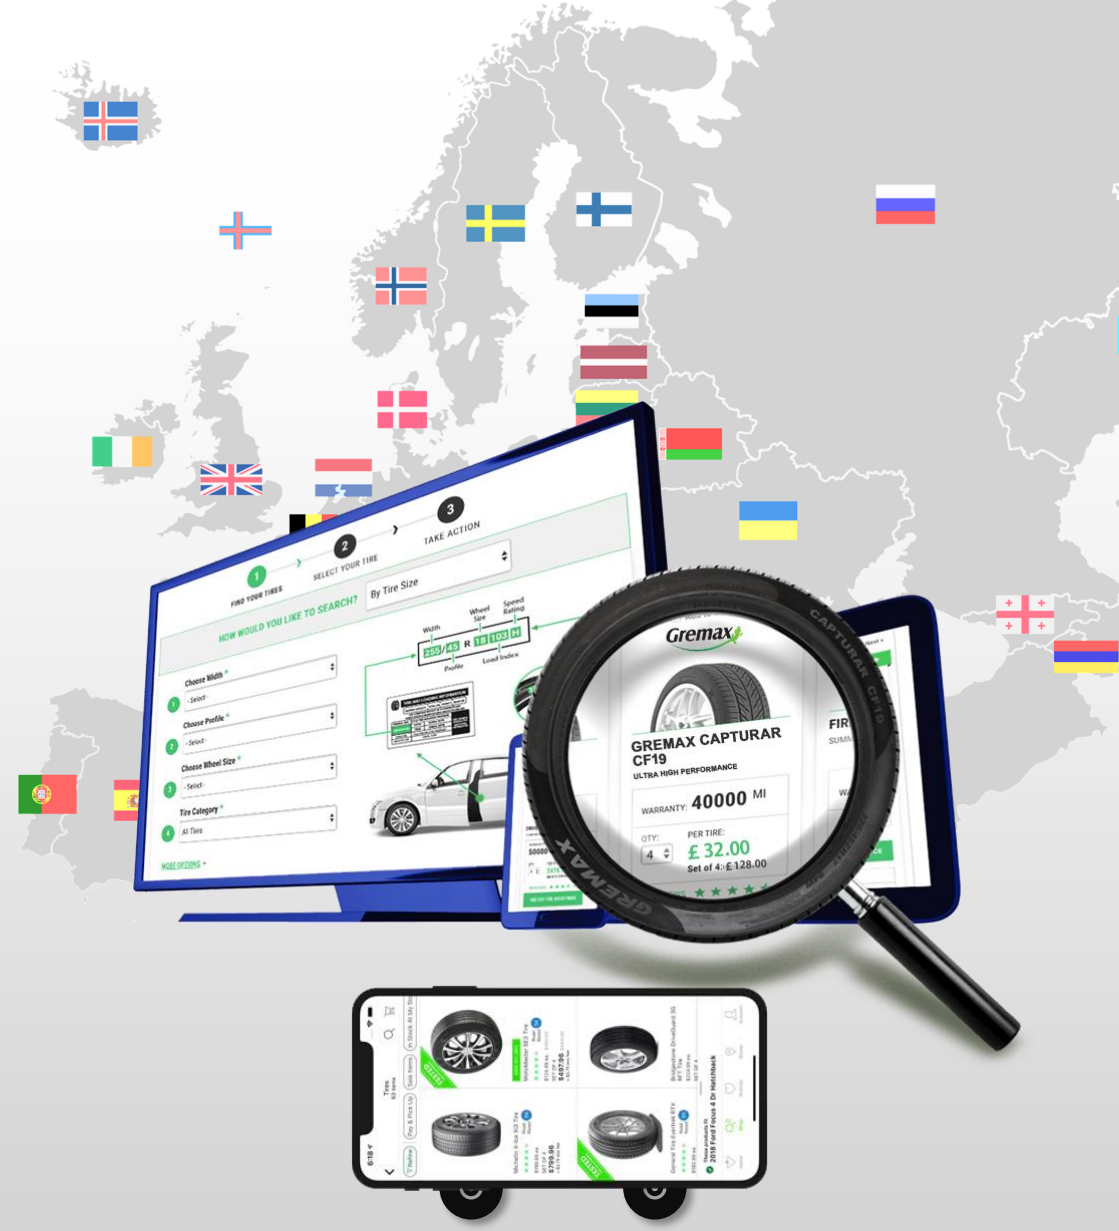

BEST PRICES
FASTEST DELIVERY

ONLY AT CROWNTYRE


High Performance Series

CAPTURAR

CF18

BEST SELLER





All season performance range designed for comfort and low noise while offering superior wet and dry traction with good handling performance and safety under both wet and dry conditions.

BENEFITS

- Jointless spiral wrap full nylon cap ply technology improves durability, strength and braking performance especially at high speed.
- Optimised pattern design offers exceptional mileage, low noise, and comfort while driving.
- Durable high-performance tread compound provides excellent grip in both wet and dry conditions as well as low rolling resistance for better fuel efficiency.

Size	LI&SR	Sidewall	Labelling	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
155/70R13	75T	BSW	E B 69	4½J	548	157	387	300
165/65R13	77H	BSW	E B 69	5.0B	544	170		
165/70R13	79T	BSW	E B 69	5J	562	170	437	300
165/80R13	83T	BSW	E B 69	4½J	594	165		
175/60R13	77T	BSW	E B 69	5J	540	177		
175/70R13	82T	BSW	E B 69	5J	576	177	475	300
185/70R13	86H	BSW	C B 69	5½J	590	189		
155/65R14	75T	BSW	E B 69	4½J	558	157	387	300
155/70R14	77T	BSW	E B 69	4½J	574	157		
165/60R14	75H	BSW	E B 69	5J	554	170	387	300
165/65R14	79T	BSW	E B 69	5J	544	170	437	300
165/70R14	81T	BSW	E B 69	5J	588	170	462	300
175/65R14	82H	BSW	E B 69	5J	584	177	475	300
175/70R14	84H	BSW	C B 69	5J	602	177	500	300
185/55R14	80H	BSW	E B 69	6J	560	194		
185/60R14	82H	BSW	E B 69	5½J	578	189	475	300
185/65R14	86H	BSW	C B 69	5½J	596	189	530	300
185/70R14	88H	BSW	C B 69	5½J	616	189		
195/60R14	86H	BSW	C B 69	6J	590	201		
195/65R14	89H	BSW	C B 69	6J	610	201		
195/70R14	91H	BSW	C B 69	6J	630	201		
205/70R14	95H	BSW	C B 69	6J	644	209		
215/70R14	96H	BSW	C B 69	6½J	658	221		
175/55R15	77T	BSW	E B 69	5½J	573	182		
175/60R15	81H	BSW	E B 69	5J	591	177		
175/65R15	84H	BSW	C B 69	5J	609	177		
185/55R15	82V	BSW	E B 69	6J	585	194	475	300
185/60R15	84H / 88H XL	BSW	C B 69	5½J	603	189	560	340
185/65R15	88H	BSW	C B 69	5½J	621	189	560	300
195/60R15	88H / 88V	BSW	C B 69	6J	615	201	560	300
195/65R15	91H / 95T XL	BSW	C B 69	6J	615	201	615	300
195/65R15	91V	BSW	C B 69	6J	635	201	615	300

High Performance Series

CAPTURAR

CR07

BEST SELLER

LIGHT-WEIGHT TECHNOLOGY



All-season economic high performance series designed for superb grip performance and aquaplaning resistance, delivering a comfortable ride with minimised noise level.

BENEFITS

- Variable pitch arrangement greatly reduces resonance coefficient and effectively lowering noise, as well as contributing to enhancing tyre comfort.
- Diversified fine-grained sipes and transverse grooves improve tyre drainage, maintaining better ground-holding force and increasing braking safety.
- Four longitudinal grooves improve tyre safety, ensuring high-speed driving, increasing tyre drainage and wet traction.
- Improved compound tread formulas effectively reduce tyre rolling resistance, enhancing fuel efficiency and achieving energy saving & environmental friendliness.

Size	LI & SR	Sidewall	Labelling	M+S	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
175/70R13	82T	BSW	E B 70	√	5J	576	177	475	300
175/65R14	82H	BSW	E B 70	√	5J	584	177	475	300
175/65R14	82T	BSW	E B 70	√	5J	584	177	475	300
185/60R14	82H	BSW	E B 70	√	5.5J	578	189	475	300
185/70R14	88H	BSW	E B 70	√	5.5J	616	189	560	300
185/55R15	82V	BSW	E B 70	√	6J	585	194	475	300
185/60R15	84H	BSW	E B 70	√	5.5J	603	189	500	300
185/65R15	88H	BSW	E B 70	√	5.5J	621	189	560	300
195/50R15	82V	BSW	E B 71	√	6J	577	201	475	300
195/55R15	85V	BSW	E B 71	√	6J	595	201	515	300
195/60R15	88H / 88V	BSW	E B 71	√	6J	615	201	560	300
195/65R15	91H / 91V	BSW	C B 71	√	6J	635	201	615	300
195/65R15	95T XL	BSW	C B 70	√	6J	635	201	615	300
205/60R15	91V	BSW	C B 71	√	6J	652	209	630	300
205/65R15	94V	BSW	C B 71	√	6J	647	209	670	300
205/55R16	91V	BSW	C B 71	√	6.5J	632	214	615	300
205/55R16	94V XL	BSW	C B 71	√	6.5J	632	214	615	300
205/55R16	94W XL	BSW	C B 71	√	6.5J	632	214	615	300
205/60R16	92V	BSW	C B 71	√	6J	652	209	630	300
215/65R16	98H	BSW	C B 71	√	6.5J	686	221	750	300

Ultra High Performance Series

CAPTURAR

CF19

BEST SELLER



UHP PERFORMANCE

FEATURES

Performance

Run-Flat

EU Label: C/E B 69

UTQG: 400/360AA

Wheel Diameter

15", 16", 17", 18", 19", 20", 22"

Available Sizes

76

PERFORMANCE RATINGS



All season performance range is designed for comfort and low noise while offering superior wet and dry traction with good handling performance and safety under both wet and dry conditions.

BENEFITS

- Asymmetrical tread pattern designed for ultimate control during cornering and traction while braking and accelerating.
- Spiral-wrapped, jointless full nylon cap ply enhances ride quality while providing high-speed durability and strength.
- Optimised tread arrangement offers smooth ride.
- Low profile design offers exceptional control and high speed stability.
- Specially formulated tread compound provides excellent grip in bogh wet and dry conditions.

Size	LI & SR	Sidewall	Labelling	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
195/50R15	82V	BSW	E B 69	6J	577	201	475	290
195/55R15	85V	BSW	C B 69	6J	595	201	515	290
205/60R15	91V	BSW	C B 69	6J	652	209	615	290
205/65R15	94V	BSW	C B 69	6J	647	209	670	290
205/70R15	96H	BSW	C B 69	6J	669	209		
215/65R15	96H	BSW	C B 69	6½J	661	221		
215/70R15	98H	BSW	C B 69	6½J	683	221		
225/60R15	96V	BSW	C B 69	6½J	651	228		
175/60R16	82H	BSW	T B 69	5J	616	177		
195/45R16	84V XL	RP	C B 69	6½J	582	195	500	290
195/50R16	84V	BSW	C B 69	6J	602	201	500	290
195/55R16	87V / 91W XL	RP	C B 69	6J	620	201	545	290
205/45R16	87W XL	RP	C B 69	7J	590	206	545	340
205/50R16	87W	BSW	C B 69	7J	612	214	545	290
205/55R16	91V / 91W	BSW	C B 69	6½J	632	214	615	290
205/60R16	92V	BSW	C B 69	6J	652	209	630	290
205/65R16	95H	BSW	C B 69	6J	672	209		
215/55R16	97W XL	BSW	C B 69	7J	642	226	730	340
215/60R16	95V	BSW	C B 69	6½J	664	221	690	290
215/65R16	98H	BSW	C B 69	6½J	686	221		
225/50R16	96W XL	BSW	C B 69	7J	632	233	710	340
225/55R16	99W XL	RP	C B 69	7J	654	233	775	340
225/60R16	98H	BSW	C B 69	6½J	676	228		
235/60R16	100H	BSW	C B 69	7J	688	240		

Size	LI & SR	Sidewall	Labelling	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
205/40R17	84W XL	RP	C B 69	7½J	596	212	500	340
205/45R17	88W XL	RP	C B 69	7J	616	206	560	340
205/50R17	93W XL	RP	C B 69	6½J	638	214	650	340
205/55R17	95W XL	BSW	C B 69	6½J	658	214		
215/40R17	87W XL	RP	C B 69	7½J	604	218	545	340
215/45R17	91W XL	RP	C B 69	7J	626	213	615	340
215/50R17	95W XL	RP	C B 69	7J	648	226	690	340
215/55R17	98W XL	RP	C B 69	7J	668	226	750	340
225/45R17	94W	RP	C B 69	7½J	634	225	670	290
225/50R17	98W XL	RP	C B 69	7J	658	233	750	340
225/55R17	101W XL	RP	C B 69	7J	680	233	825	340
235/45R17	97W XL	RP	C B 69	8J	644	236	730	340
235/50R17	100W XL	BSW	C B 69	7½J	668	245		
235/55R17	103V XL	RP	C B 69	7½J	690	245		
245/40R17	95W XL	BSW	C B 69	8½J	628	248		
245/45R17	99W XL	RP	C B 69	8J	652	243		
215/35R18	84W XL	BSW	C B 69	7½J	607	218		
215/40ZR18	89W XL	RP	C B 69	7½J	629	218		
215/45R18	93W XL	BSW	C B 69	7J	651	213		
225/40R18	92W XL	RP	C B 69	8J	637	230	630	340
225/45R18	95W XL	RP	C B 69	7½J	659	225	690	340
235/40R18	95W XL	RP	C B 69	8½J	645	241	690	340
235/45R18	98W XL	RP	C B 69	8J	669	236		
235/50R18	101W XL	BSW	C B 72	7½J	693	245		
235/55R18	104V XL	BSW	C B 72	7½J	715	245		
245/40R18	97W XL	RP	C B 69	8½J	653	248	730	340
245/45R18	100W XL	RP	C B 69	8J	677	243	800	340
245/50R18	104W XL	RP	C B 69	7½J	703	253		
255/35ZR18	94W XL	RP	C B 73	9J	635	260		
255/45R18	103W XL	RP	C B 73	8½J	687	255		
255/55R18	109W XL	RP	C B 73	8J	737	265		
225/35R19	88W XL	RP	C B 69	8J	641	230	560	340
235/35R19	91W XL	RP	C B 69	8½J	647	241	615	340
235/40ZR19	96W XL	BSW	C B 69	8½J	671	241		
245/35R19	93W XL	RP	C B 69	8J	655	248	650	340
245/45R19	102W XL	RP	C B 69	8J	703	243		
255/30ZR19	91W XL	RP	C B 73	9J	637	260		
255/40ZR19	96W XL / 100W XL	RP	C B 73	9J	687	260		
245/35ZR20	95W XL	BSW	C B 69	8½J	680	248		
255/30ZR20	92W XL	RP	C B 73	9J	662	260		
275/35ZR20	102W XL	RP	C B 73	9½J	700	278		
295/40ZR22	112W XL	RP	C B 75	10½J	795	301		

Ultra High Performance Series

CAPTURAR

CS01

BEST SELLER

LIGHT-WEIGHT TECHNOLOGY



Ultra high performance series designed for excellent handling and grip performances.
Innovative design in pattern and compound provides excellent water drainage performance, low noise and comfort.

BENEFITS

- Multiple compound tread enhances comfort and increases fuel efficiency, contributing to energy saving and environmental friendliness.
- Wide longitudinal grooves effectively increase tire safety, ensuring high-speed driving, and enhancing tire drainage and wet traction.
- Unequal pitch order effectively reduces resonance coefficient and lowers noise and improves comfort performance.
- Asymmetrical pattern design clearly differentiates functions of inner and outer sides, and enhances driving stability at high speed.
- Diversified sipes and sliced grooves greatly improve stability and comfort in high-speed driving.

Size	LI&SR	Sidewall	Labelling	M+S	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
205/45R16	87W XL	BSW	C C 71	√	7J	590	206	545	340
205/55R16	91W XL	BSW	C C 71	√	6.5J	632	214	615	300
215/55R16	97W XL	BSW	C C 71	√	7J	642	226	730	340
205/40R17	84W XL	BSW	C C 71	√	7.5J	596	212	500	340
205/45R17	88W XL	BSW	C C 71	√	7J	616	206	560	340
205/50R17	93W XL	BSW	C C 71	√	6.5J	638	214	650	340
215/40R17	87W XL	BSW	C C 71	√	7.5J	604	218	545	340
215/45R17	91W XL	BSW	C C 71	√	7J	626	213	615	340
215/50R17	95W XL	BSW	C C 71	√	7J	648	226	690	340
215/55R17	98W XL	BSW	C C 71	√	7J	668	226	750	340
225/45R17	94W XL	BSW	C C 71	√	7.5J	634	225	670	340
225/50R17	98W XL	BSW	C C 71	√	7J	658	233	750	340
225/55R17	101W XL	BSW	B C 71	√	7J	680	233	825	340
235/45R17	97W XL	BSW	C C 71	√	8J	644	236	730	340
235/55R17	103W XL	BSW	B C 71	√	7.5J	690	245	875	340
215/35R18	84W XL	BSW	C C 71	√	7.5J	607	218	500	340
225/40R18	92W XL	BSW	C C 71	√	8J	637	230	630	340
225/45R18	95W XL	BSW	C C 71	√	7.5J	659	225	690	340
235/40R18	95W XL	BSW	C C 71	√	8.5J	645	241	690	340
235/45R18	98W XL	BSW	C C 71	√	8J	669	236	750	340
245/40R18	97W XL	BSW	C C 70	√	8.5J	650.2	254	730	340
245/45R18	100W XL	BSW	B C 71	√	8J	677	243	800	340

Ultra High Performance Series

CAPTURAR

CF26



This ultra-high performance collection is designed for outstanding grip in all weather conditions.

BENEFITS

- Directional tread pattern enables maximum water evacuation from footprint area to prevent aquaplaning.
- Optimised casing design provides sure-footed performance while maintaining a comfortable ride and low road noise.
- Customised tread compound provides excellent grip in both wet and dry conditions combined with superior tread life.

Size	LI&SR	Sidewall	UTQG	M+S	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
225/30ZR20	85W XL	BSW	320AA	M+S	8J	644	230	515	340
225/35ZR20	90W XL	BSW	320AA	M+S	8J	666	230	600	340
245/35ZR20	95W XL	BSW	320AA	M+S	8½J	680	248	690	340
255/35ZR20	97Y XL	BSW	320AA	M+S	9J	686	260	730	340
275/40ZR20	106W XL	BSW	320AA	M+S	9½J	728	278	950	340
275/45R20	110W XL	BSW	320AA	M+S	9J	756	273	1060	340
285/50R20	116W XL	BSW	320AA	M+S	9J	794	297	1250	340
245/30ZR22	92W XL	BSW	320AA	M+S	8½J	707	248	630	340
255/30ZR22	95W XL	BSW	320AA	M+S	9J	713	260	690	340
265/35ZR22	102W XL	BSW	320AA	M+S	9½J	745	271	850	340
305/40ZR22	114W XL	BSW	320AA	M+S	11J	803	313	1180	340
255/30ZR24	97W XL	BSW	320AA	M+S	9J	764	260	730	340
305/35ZR24	112W XL	BSW	320AA	M+S	11J	824	313	1120	340

High Performance Series

CAPTURAR
CF1

BEST SELLER

WSW OWL DESIGN DESIGN



HIGH PERFORMANCE
FEATURES

Performance
All-Season HP
M+S Rated
UTQG: 400AA
Wheel Diameter
13", 14", 15", 16", 17"
Available Sizes
64

All season economic performance range designed for low noise and comfortable ride with long tread life.

BENEFITS

- Wide circumferential grooves for enhanced water drainage and wet performance.
- Optimised tread pitch sequence designed for low noise and comfort.
- Full width spiral nylon cap ply ensures footprint stability and durability.

PERFORMANCE RATINGS



Size	LI&SR	UTQG	M+S	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
155/65R13	73T	400AA	M+S	4½J	157	532	365	300
155/70R13	75T	400AA	M+S	4½J	157	548	387	300
155/80R13	79T	400AA	M+S	4½J	157	578	437	300
165/65R13	77T	400AA	M+S	5J	170	544	412	300
165/70R13	79T	400AA	M+S	5J	170	562	437	300
165/80R13	83T	400AA	M+S	4½J	165	594	487	300
175/60R13	77T	400AA	M+S	5J	177	540	412	300
175/70R13	82T / 82S	400AA	M+S	5J	177	576	475	300
185/70R13	86T / 86H	400AA	M+S	5½J	189	590	530	300
175/70R14	84S	400AA	M+S	5J	177	602	500	300
165/70R14	81T	400AA	M+S	5J	170	588	462	300
175/65R14	82T / 82H	400AA	M+S	5J	177	584	475	300
175/65R14	86T XL	400AA	M+S	5J	177	584	475	300
175/70R14	84T	400AA	M+S	5J	177	602	500	300
185/60R14	82H	400AA	M+S	5½J	189	578	475	300
185/65R14	86H	400AA	M+S	5½J	189	596	530	300
185/70R14	88H	400AA	M+S	5½J	189	616	560	300
195/60R14	86H	400AA	M+S	6J	201	590	530	300
195/65R14	89H	400AA	M+S	6J	201	610	580	300
195/70R14	91H	400AA	M+S	6J	201	630	615	300
205/60R14	88H	400AA	M+S	6J	209	602	560	300
205/70R14	95H	400AA	M+S	6J	209	644	690	300
215/70R14	96H	400AA	M+S	6½J	221	658	710	300




Size	LI&SR	UTQG	M+S	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
175/65R15	84H	400AA	M+S	5J	177	609	500	300
185/55R15	82H / 82V	400AA	M+S	6J	194	585	475	300
185/60R15	88H XL	400AA	M+S	5½J	189	603	560	340
185/65R15	88H	400AA	M+S	5½J	189	621	560	300
195/50R15	82V	400AA	M+S	6J	201	577	475	300
195/55R15	85V	400AA	M+S	6J	201	595	515	300
195/60R15	88H	400AA	M+S	6J	201	615	560	300
195/65R15	91H / 91V	400AA	M+S	6J	201	635	615	300
205/60R15	91H / 91V	400AA	M+S	6J	209	627	615	300
205/65R15	94H / 94V	400AA	M+S	6J	209	647	670	300
205/70R15	96H	400AA	M+S	6J	209	669	710	300
215/60R15	94H	400AA	M+S	6½J	221	639	670	300
215/65R15	96H	400AA	M+S	6½J	221	661	710	300
215/70R15	98H	400AA	M+S	6½J	221	683	750	300
225/60R15	96V	400AA	M+S	6½J	228	651	710	300
195/55R16	91V XL	400AA	M+S	6J	201	620	615	300
195/60R16	89H	400AA	M+S	6J	201	640	580	300
205/55R16	94V XL	400AA	M+S	6½J	214	632	615	300
205/60R16	92H	400AA	M+S	6J	209	652	630	300
205/65R16	95H	400AA	M+S	6J	209	672	690	300
215/55R16	93V	400AA	M+S	7J	226	642	650	300
215/55R16	97W XL	400AA	M+S	7J	226	642	730	340
215/60R16	95H	400AA	M+S	6½J	221	664	690	300
215/65R16	98H	400AA	M+S	6½J	221	686	750	300
225/55R16	95V	400AA	M+S	7J	233	654	690	300
225/60R16	98H	400AA	M+S	6½J	228	676	750	300
235/60R16	100H	400AA	M+S	7J	240	688	800	300
215/55R17	94V	400AA	M+S	7J	226	668	670	300
225/55R17	101H XL	400AA	M+S	7J	233	680	825	340

High Performance Series

CAPTURAR

CF8





All season performance series designed for comfort and low noise while offering superior wet and dry traction with good handling performance and safety under both wet and dry conditions.

BENEFITS

- Spiral-wrapped, jointless full nylon cap ply enhances ride quality while providing high-speed durability and strength.
- Customised tread compound provides excellent grip in both wet and dry conditions combined with superior tread life.

Size	LI&SR	UTQG	M+S	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
195/65R15	91H	460AA	M+S	6J	201	635	615	300
215/60R15	94H	460AA	M+S	6½J	221	639	670	300
215/75R15	100H	460AA	M+S	6J	216	703	800	300
205/50R16	87V	460AA	M+S	6½J	214	612	545	300
225/55R16	99V XL	460AA	M+S	7J	233	654	775	340
235/60R16	100H	460AA	M+S	7J	240	688	800	300
225/55R18	98V	460AA	M+S	7J	233	705	750	300

Grand Touring Performance Series

CAPTURAR CF3

HIGH WEAR



TOURING SERIES

FEATURES

Performance
All-Season Touring
M+S Rated
UTQG: 700AA
Wheel Diameter
16", 17", 18"
Available Sizes
12

All season touring collection designed to offer quiet and comfortable ride with maximum traction and safety with long even tread wear.

BENEFITS

- Asymmetrical pattern design ensures optimum grip and handling performance, as well as improving aquaplaning resistance.
- Full width nylon cap ply provides stability and high wear resistance, enhancing ride comfort and durability at high speeds.



Size	LI&SR	UTQG	M+S	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
205/55R16	91V	700AA	M+S	6½J	214	632	615	300
215/55R16	93V	700AA	M+S	7J	226	642	650	300
215/60R16	95H	700AA	M+S	6½J	221	664	690	300
225/55R16	95V	700AA	M+S	7J	233	654	690	300
225/60R16	98H	700AA	M+S	6½J	228	676	750	300
215/55R17	94V	700AA	M+S	7J	226	668	670	300
215/60R17	96H	700AA	M+S	6½J	221	690	710	300
215/65R17	99H	700AA	M+S	6½J	221	712	775	300
225/55R17	97V	700AA	M+S	7J	233	680	730	300
225/60R17	99H	700AA	M+S	6½J	228	702	775	300
225/55R18	98V	700AA	M+S	7J	233	705	750	300
225/60R18	100H	700AA	M+S	6½J	228	727	803	300

Touring Performance Series

CAPTURAR

CF2



TOURING SERIES


FEATURES

Performance
All-Season Touring
M+S Rated
UTQG: 480AA
Wheel Diameter
13", 14", 15", 16"
Available Sizes
32

All season performance collection designed for quiet, safe and smooth driving with long even tread wear.

BENEFITS

- Optimised pitch arrangement and stablised footprint design ensures excellent control under challenging road conditions.
- Full width nylon cap ply provides better footprint contact for cornering control and handling.



Size	LI&SR	UTQG	M+S	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
175/70R13	82T	480AA	M+S	5J	177	576	470	300
175/65R14	82T	480AA	M+S	5J	177	584	475	300
175/70R14	84T	480AA	M+S	5J	177	602	500	300
185/60R14	82H	480AA	M+S	5½J	189	578	475	300
185/65R14	86H	480AA	M+S	5½J	189	596	530	300
185/70R14	88T	480AA	M+S	5½J	189	616	560	300
185/75R14	89T	480AA	M+S	5J	184	634	585	300
195/60R14	86H	480AA	M+S	6J	201	590	530	300
195/70R14	91T	480AA	M+S	6J	201	630	615	300
215/75R14	100T	480AA	M+S	5½J	216	678		
165/80R15	87T	480AA	M+S	4½J	165	645	545	300
185/55R15	82H	480AA	M+S	6J	194	585	475	300
185/60R15	84H	480AA	M+S	5½J	189	603	500	300
185/65R15	88H	480AA	M+S	5½J	189	621	560	300
195/55R15	85V	480AA	M+S	6J	201	595	515	300
195/60R15	88H	480AA	M+S	6J	201	615	560	300
195/65R15	91H	480AA	M+S	6J	201	635	615	300
205/60R15	91H	480AA	M+S	6J	209	627	615	300
205/65R15	94H	480AA	M+S	6J	209	647	670	300
205/70R15	96T	480AA	M+S	6J	209	669	710	300
215/65R15	96H	480AA	M+S	6½J	221	661	710	300
215/70R15	98T	480AA	M+S	6½J	221	683	750	300
205/55R16	91V	480AA	M+S	6½J	214	632	615	300
205/60R16	92H	480AA	M+S	6J	209	652	630	300
205/65R16	95H	480AA	M+S	6J	209	672	690	300
215/55R16	93H	480AA	M+S	7J	226	642	650	300
215/60R16	95H	480AA	M+S	6½J	221	664	690	300
215/65R16	98H	480AA	M+S	6½J	221	686	750	300
225/60R16	98H	480AA	M+S	6½J	228	676	750	300

Touring Performance Series

MAX 5800

WSW DESIGN



This new generation all-season economy touring range is designed for economy and comfort with long tread life and appealing sidewall design.

BENEFITS

- 5 Rib tread design with 4 wide circumferential grooves for enhanced water drainage and wet performance.
- White Sidewall enhances appearance on vehicle
- Optimised tread pitch sequence designed for low noise and comfort
- Multiple sipe tread blocks for All Season performance
- Full width Spiral Nylon Cap ply ensures footprint stability and durability

Size	LI&SR	UTQG	M+S	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Load (lbs)	Max Air (kpa)	Max Air (psi)
205/75R14	95S	400AA	M+S	5½J	664	203	690	1521	300	44
205/70R15	96S	400AA	M+S	6J	669	209	710	1565	300	44
215/75R15	100S	400AA	M+S	6J	703	216	800	1764	300	44

4x4 Highway Terrain Series

CAPTURAR

CF28


BEST SELLER



All season highway terrain SUV touring range designed for smooth, comfortable and surefooted performance.

BENEFITS

- Optimised footprint with full-width spiral nylon cap ply delivers high speed stability and durability under demanding driving conditions.
- Five-rib tread with multiple sipings provides stable driving experience with minimal noise emission, as well as improved wear resistance.
- Four wide circumferential grooves assist with water evacuation from footprint area to prevent hydroplaning.



Size	LI & SR	Sidewall	Labelling	Std. Rim	O.D. (mm)	S.W. (mm)
215/65R16	98H	BSW	C C 72	6½J	686	221
215/70R16	100H	BSW	C C 72	6½J	708	221
225/70R16	103H	BSW	C C 72	6½J	722	228
235/70R16	106H	BSW	C C 72	7J	736	240
245/70R16	111H XL	BSW	C C 72	7J	750	248
265/70R16	112H	BSW	C C 72	8J	778	272
215/60R17	96V	BSW	C C 72	6½J	690	221
225/60R17	99H	BSW	C C 72	6½J	702	228
225/65R17	102H	BSW	C C 72	6½J	724	228
235/60R17	102H	BSW	C C 72	7J	714	240
235/55R17	103V XL	BSW	C C 72	7½J	690	245
235/65R17	108H XL	BSW	C C 72	7J	738	240
245/65R17	111H XL	BSW	C C 72	7J	750	248
265/65R17	112H	BSW	C C 72	8J	776	272
215/55R18	95V	BSW	C C 72	7J	693	226
235/50R18	101V XL	BSW	C C 72	7½J	693	245
235/55R18	104V XL	BSW	C C 72	7½J	715	245
235/60R18	107V XL	BSW	C C 72	7J	739	240
255/55R18	109V XL	BSW	C C 72	8J	737	265
285/60R18	116V	BSW	C C 73	8½J	799	292
255/55R19	111V XL	BSW	C C 72	8J	763	265

4x4 Mud Terrain Series

CAPTURAR

CF5

BEST SELLER



This mud terrain collection provides excellent control in wild side driving.

BENEFITS


- Large stiff tread blocks offer superior traction under both dry and wet conditions.
- Strong body design provides extra load capacity.

Size	LI&SR	Sidewall	Labelling	M+S	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
31*10.50R15LT	109Q 6PR	RWL	POR	√	8½J	775	268	1030	350
33*12.50R15LT	108Q 6PR	RWL	POR	√	10J	826	318	1000	250
LT235/75R15	104/101Q 6PR	RWL	POR	√	6½J	733	235	900/825	350
LT235/70R16	110/107Q	RWL	POR	√	7J	736	240	1060/975	450
LT245/75R16	120/116Q 10PR	RWL	POR	√	7J	774	248	1400/1250	550
LT285/75R16	122/119Q 8PR	RWL	POR	√	8J	834	286	1700/1550	550

4x4 Highway Terrain Series

MAX *HT*





All-Season touring collection designed for premium SUV touring vehicles.

BENEFITS

- Specially formulated compound optimised for long wear.
- Five-rib tread with multiple sipings provide stable ride and higher wear resistance.
- Four widened circumferential grooves offer excellent hydroplaning resistance.
- Solid shoulder pattern improves handling stability at high speed.
- Straight center rib improves snow traction.

Size	LI&SR	Sidewall	UTQG	M+S	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
205/70R15	96H	BSW	460AB	M+S	6J	669	209	710	300
235/75R15	105H	BSW	460AB	M+S	6½J	733	235	925	300
215/65R16	102H XL	BSW	460AB	M+S	6½J	686	221	850	340
225/70R16	103H	BSW	460AB	M+S	6½J	722	228	875	300
235/60R16	100H	BSW	460AB	M+S	7J	688	240	800	300
235/70R16	106H	BSW	460AB	M+S	7J	736	240	950	300
245/70R16	107H	BSW	460AB	M+S	7J	750	248	975	300
265/70R16	112H	BSW	460AB	M+S	8J	778	272	1120	300
225/65R17	102H	BSW	460AB	M+S	6½J	724	228	850	300
235/65R17	108H XL	BSW	460AB	M+S	7J	738	240	1000	340
235/65R17	108V XL	BSW	460AB	M+S	7J	738	240	1000	340
235/60R18	107V XL	BSW	460AB	M+S	7J	739	240	975	340
255/55R18	109V XL	BSW	460AB	M+S	8J	737	265	1030	340

4x4 All Terrain Series

MAX AT


OWL DESIGN



All-Season touring collection designed for premium all-terrain SUV vehicles, with the overall construction and design focusing on maximising ride refinement.

BENEFITS

- Tiered groove design enables a small moving angel of the tread block when cornering and kicks the rocks off.
- Center rib enhances directional performance.
- Aggressive shoulder design improves off-the-road performance.



Size	LI&SR	Sidewall	UTQG	M+S	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
235/75R15	109T XL	OWL	480AA	M+S	6½J	733	235	1030	340
215/70R16	100T	OWL	480AB	M+S	6½J	708	221		
235/70R16	106T	OWL	480AA	M+S	7J	736	240	950	300
245/70R16	107T	OWL	480AA	M+S	7J	750	248	975	300
265/70R16	112T	OWL	480AA	M+S	8J	778	272	1120	300
225/65R17	102T	OWL	480AB	M+S	6½J	724	228		
235/65R17	108T XL	OWL	480AA	M+S	7J	738	240	1000	350
245/65R17	107T	OWL	480AA	M+S	7J	750	248	975	300
265/65R17	112T	OWL	480AA	M+S	8J	776	272	1120	300
265/70R17	115T	OWL	480AA	M+S	8J	804	272	1215	300
265/60R18	110T	OWL	480AA	M+S	8J	775	272	1060	300
275/65R18	116T	OWL	480AA	M+S	8J	815	279	1250	300
265/50R20	111T XL	OWL	480AA	M+S	8½J	774	277	975	300
275/55R20	117T XL	OWL	480AA	M+S	8½J	810	284	1285	340
275/60R20	115T	OWL	480AA	M+S	8J	838	279	1215	300
31*10.50R15LT	109S	OWL	480AA	M+S	8½J	775	268	1030	350
LT215/75R15	106/103S	OWL	480AA	M+S	6J	703	216		
LT215/85R16	115/112S	OWL	480AA	M+S	6J	772	216	1215/1120	550
LT225/75R16	115/112S	OWL	480AA	M+S	6J	744	223	1215/1120	550
LT235/85R16	120/116S	OWL	480AA	M+S	6½J	806	235	1380/1260	550
LT245/75R16	120/116S	OWL	480AA	M+S	7J	774	248	1380/1260	550
LT265/75R16	123/120S	OWL	480AA	M+S	7½J	804	267	1550/1400	550
LT285/75R16	122/119S 8PR	OWL	480AA	M+S	8J	834	286	1500/1360	450
LT265/70R17	121/118S	OWL	480AA	M+S	8J	804	272	1450/1320	450
LT285/70R17	121/118S	OWL	480AA	M+S	8½J	832	292	1450/1320	550
LT275/65R20	126/123S	OWL	480AA	M+S	8J	866	279	1701/1549	550

NEW

4x4 All Terrain

TERRA BREAKER A/T

4x4 ALL TERRAIN

FEATURES

Performance
All Terrain, All-Season

Specifications
F-Rated, 12 PLY, Snow-Rated, Rim Protector

Mileage Warranty
50K Miles

Wheel Diameter
15", 16", 17", 18", 20", 22"

Available Sizes
24



Innovative Stone Ejecters between blocks improve driving stability for rock & stone surface and haulage surface.

Big blocks in concave and convex shapes ensure the driving force and suitable for various road conditions.

Creative sipe design with tiny blades on blocks improves traction and heat resistance, and ensures longer lifetime.

Visually striking grooves with the classic longitudial design ensure water evacuation performance.

Innovative reinforcement bar improves resistance to cuts, abrasions, tearing and cracking.

Special pattern design on shoulder and rim protector to protect against sidewall and wheel damages.

Size	LI&SR	Ply Rating	Sidewall	UTQG	Rim Protector	Std. Rim	O.D. (inch)	S.W. (inch)	Max Load (lbs)	Max Air (psi)
P225/65R17	100T		RWL	560AB	YES	6.5	28.5	8.9	1874	51
P265/70R17	113T		RWL	560AB	YES	8	31.7	10.6	2535	51
P275/65R18	114T		RWL	560AB	YES	8	32	11.1	2756	51
P275/55R20	111S		RWL	560AB	YES	8.5	31.8	11.1	2833	50
31x10.50R15LT	109R	6PR/LR C	RWL	560AB	YES	8.5	30.6	10.7	2270	50
35x12.50R15LT	113R	6PR/LR C	RWL	560AB	YES	10	34.5	12.5	2535	35
35x12.50R17LT	121R	10PR/LR E	RWL	560AB	YES	10	34.5	12.5	3195	65
35x12.50R18LT	123R	10PR/LR E	RWL	560AB	YES	10	34.5	12.5	3415	65
35x12.50R20LT	121R	10PR/LR E	RWL	560AB	YES	10	34.5	12.5	3195	65
35x12.50R22LT	121R	12PR/LR F	RWL	560AB	YES	10	35	12.8	2835	65
LT235/85R16	120/116S	10PR/LR E	RWL	560AB	YES	6.5	31.9	9.4	3042/2778	80
LT225/75R16	115/112R	10PR/LR E	RWL	560AB	YES	6	29.4	8.7	2679/2469	80
LT245/75R16	120/116R	10PR/LR E	RWL	560AB	YES	7	30.6	9.8	3042/2778	80
LT265/75R16	123/120R	10PR/LR E	RWL	560AB	YES	7.5	31.7	10.6	3415/3085	80
LT285/75R16	126/123R	10PR/LR E	RWL	560AB	YES	8	32.8	11.5	3750/3417	80
LT245/75R17	121/118R	10PR/LR E	RWL	560AB	YES	7	31.7	9.6	3195/2910	80
LT265/70R17	121/118R	10PR/LR E	RWL	560AB	YES	8	31.9	10.7	3195/2910	80
LT285/70R17	121/118S	8PR/LR D	RWL	560AB	YES	8.5	32.9	11.3	3195/2910	80
LT305/65R17	121/118R	10PR/LR E	RWL	560AB	YES	9	32.6	12.2	3195/2910	65
LT275/65R18	123/120S	10PR/LR E	RWL	560AB	YES	8	32.1	11	3415/3085	80
LT275/70R18	125/122S	10PR/LR E	RWL	560AB	YES	8	33.3	10.8	3640/3305	80
LT275/65R20	126/123S	10PR/LR E	RWL	560AB	YES	8	34	11	3750/3417	80
LT305/55R20	121/118R	10PR/LR E	RWL	560AB	YES	9.5	33.5	11.9	3195/2910	65



Light Commercial Series

CAPTURAR
CF12

BEST SELLER

WSW DESIGN



LIGHT COMMERCIAL

FEATURES

Performance

All-Season Haul
Urban Light Duty
EU Label: E B 71

Wheel Diameter

13", 14", 15", 16"

Available Sizes

24

PERFORMANCE RATINGS

Braking 9

Comfort 7

Handling 7

Fuel Efficiency 7

Wear Resistance 8

An all-season commercial van collection with rugged pattern and extra durable construction, designed for high mileage combined with fuel economy, as well as high traction and stable handling in wet weather.

BENEFITS

- Zig-zag pattern designed for excellent traction performance.
- Optimised structure and tread compound improve strength and durability.

Size	LI&SR	Sidewall	Labelling	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
155R13C	85/83R 6PR	BSW	E B 70	4½J	578	157	515	350
165R13C	91/89R 6PR	BSW	E B 70	4½J	596	167	615	375
175R14C	99/98Q 8PR	BSW	E B 71	5J	634	178	775	450
185R14C	102/100R	BSW	E B 71	5½J	650	188	850	450
195R14C	106/104Q	BSW	E B 71	5½J	666	198	950	450
195R15C	106/104R	BSW	E B 71	5½J	691	198	950	450
165/70R13C	88/86S 6PR	BSW	E B 70	5J	562	170	560	375
175/70R14C	95/93S 6PR	BSW	E B 70	5J	602	177	690	375
205/75R14C	109/107R	BSW	E B 71	5½J	691	198	1030	475
195/70R15C	104/102S 8PR	BSW	E B 71	6J	655	201	900	450
205/70R15C	106/104R	BSW	E B 71	6J	669	209	950	450
205/75R15C	103/100R	BSW	E B 71	5½J	689	203	875	450
215/70R15C	109/107R	BSW	E B 71	6½J	683	221	1030	450
225/70R15C	112/110R	BSW	E B 72	6½J	697	228	1120	450
175/75R16C	101/99R 8PR	BSW	E B 71	5J	668	177	825	475
185/75R16C	104/102R	BSW	E B 71	5J	684	184	900	475
195/75R16C	107/105R 8PR	BSW	E B 71	5½J	698	196	975	450
215/70R16C	108/106R 8PR	BSW	E B 71	6½J	683	221	1000	375
215/75R16C	113/111R 8PR	BSW	E B 71	6J	728	216	1150	475
185R14C	102/100R	WSW	E B 71	5½J	650	188	850	450
195R14C	106/104R	WSW	E B 71	5½J	666	198	950	450
195R15C	106/104R	WSW	E B 71	5½J	691	198	950	450
205/75R14C	109/107R	WSW	E B 71	5½J	664	203	1030	475
205/75R15C	103/100R 8PR	WSW	E B 71	5½J	689	203	875	450

Light Commercial Series

CAPTURAR

CF20



An economical light commercial collection designed for heavy loaded vans under all season conditions. Heavy-duty, tough, and tested against extreme elements, along with increased mileage and high durability, the series is the choice hat fits your workload.

BENEFITS

- 4-rib design with wide optimised footprint provides for stable ride under heavy loads and even wear for long mileage.
- Stabilised shoulder design with heat dissipating grooves prevent heat build-up under severe load operating conditions, as well as improving durability.

Size	LI&SR	Sidewall	Labelling	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
185R14C	102/100R	BSW	E B 72	5½J	652	189	850	450
205R16C	110/108Q 8PR	BSW	E B 72	6J	736	208		
195/70R15C	104/102R	BSW	E B 72	6J	655	201	900	450
225/70R15C	112/110R	BSW	E B 72	6½J	697	228	1120	450
195/65R16C	104/102R	BSW	E B 72	6J	660	201	900	475
205/65R16C	107/105R	BSW	E B 72	6J	672	209	975	475
215/75R16C	113/111R	BSW	E B 72	6J	728	216	1150	475
235/65R16C	115/113R 8PR	BSW	E B 72	7J	712	240	1215	475
205/65R15C	102/100T 6PR	BSW	E B 72	6J	647	209	850	375
215/65R15C	104/102T 6PR	BSW	E B 72	6½J	661	221	900	375
195/60R16C	99/97T 6PR	BSW	E B 72	6J	640	201	775	375
215/60R16C	108/106T 8PR	BSW	E B 72	6½J	664	221	1000	475
215/65R16C	109/107T 8PR	BSW	E B 72	6½J	686	221	1030	475
225/65R16C	112/110T 8PR	BSW	E B 72	6½J	698	228	1120	475
205/75R16C	110/108R 8PR	BSW	E B 72	5½J	714	203	1060	475

Light Commercial Series

MAX TRANSP

BEST SELLER

WSW DESIGN



LIGHT COMMERCIAL

FEATURES

Performance

All-Season Haul
Urban Light Duty
M+S Rated

Wheel Diameter

14", 15"

Available Sizes

4

A durable economical commercial series designed for popular van fitments, available in white sidewall.

BENEFITS

- 3-wide straight aqua channels improve wet performance.
- Zigzag main grooves enhance traction. Closed rigid shoulder blocks improve high road endurance and high-speed driving stability.
- White Sidewall (WSW) design available.

PERFORMANCE RATINGS



Size	LI&SR	M+S	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Load (lbs)	Max Air (kpa)	Max Air (psi)
195R14C	106/104Q	M+S	5½J	666	198	950/900	2094/1984	450	65
195R15C	106/104Q	M+S	5½J	693	196	950/900	2094/1984	450	65
205/75R14C	109/107Q	M+S	5½J	664	203	1030/975	2271/2149	475	68
205/75R15C	109/107Q	M+S	5½J	689	203	1030/975	2271/2149	475	68



Winter Performance

GM608

NEW

BEST SELLER



WINTER COLLECTION

FEATURES

Performance
3PMSF-Rated
EU Label: E C 71
Wheel Diameter
13", 14", 15", 16", 17", 18"
Available Sizes
30



This studless winter high performance collection with multi-angle sipings is designed to enable larger grounding area, providing higher safety performance and excellent traction under wet and snow conditions.

BENEFITS

- Deep 3D right-angled outer shoulder design increases the shovelling ability.
- Suction pump and water storage hole design enables the tread to absorb the water film on the surface of ice and snow into the suction pump.
- Zigzag trapezoid grooves, narrow on the top and wide on the bottom, forming a snow pump under the force between the tyre and the ground, enable water film evaluation in short time, easily discharging snow and water.
- Stepped snow shovel in Z-shaped pattern grooves makes sure tire and road are stay attached, enhanced grip ability.

Size	LI&SR	Sidewall	Labelling	3PMSF	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
155/70R13	75T	BSW	E C 71	√	4½B	548	157	387	300
155/80R13	79T	BSW	E C 71	√	4½B	578	157	437	300
165/70R13	79T	BSW	E C 71	√	5B	562	170	437	300
175/70R13	82T	BSW	E C 71	√	5B	576	177	475	300
155/65R14	75T	BSW	E C 71	√	4½J	558	157	387	300
165/65R14	79T	BSW	E C 71	√	5J	570	170	437	300
165/70R14	81T	BSW	E C 71	√	5J	588	170	462	300
175/65R14	82T	BSW	E C 71	√	5J	584	177	475	300
175/70R14	84T	BSW	E C 71	√	5J	602	177	500	300
185/60R14	82T	BSW	E C 71	√	5½J	578	189	475	300
185/65R14	86T	BSW	E C 71	√	5½J	596	189	530	300
175/65R15	84T	BSW	E C 71	√	5J	609	177	500	300
185/55R15	82T	BSW	E C 71	√	6J	585	194	475	300
185/60R15	84T	BSW	E C 71	√	5½J	603	189	500	300
185/65R15	88T	BSW	E C 71	√	5½J	621	189	560	300
195/55R15	85T	BSW	E C 72	√	6J	595	201	515	300
195/60R15	88T	BSW	E C 72	√	6J	615	201	560	300
195/65R15	91T	BSW	E C 72	√	6J	635	201	615	300
195/55R16	87H	BSW	E C 71	√	6J	620	201	545	300
205/55R16	91T	BSW	E C 72	√	6½J	632	214	615	300
205/60R16	92T	BSW	E C 72	√	6J	652	209	630	300
215/55R16	93H	BSW	E C 72	√	7J	642	226	650	300
215/60R16	95T	BSW	E C 72	√	6½J	664	221	690	300
215/65R16	102H	BSW	E C 72	√	6½J	686	221	850	340
225/55R16	95H	BSW	E C 72	√	7J	654	233	690	300
215/55R17	98T	BSW	E C 72	√	7J	668	226	750	340
225/45R17	94H	BSW	E C 72	√	7½J	634	225	670	340
225/50R17	94H	BSW	E C 72	√	7J	658	233	670	300
225/55R17	97T	BSW	E C 72	√	7J	680	233	730	300
225/40R18	92H	BSW	E C 72	√	8J	637	230	630	340

Winter Ultra High Performance

GM605

BEST SELLER



This studless winter ultra-high performance collection is designed for strong adhesion to snow road and braking performance, improving handling performance and ensuring safe driving.

BENEFITS

- Handling Performance
  Interval arranged lateral groove design in carter part increase grip ability on snow/ice terrain, guarantees safe handling performance.
- Drainage Performance
  Wide and straight longitudinal groove design improves performance on wet ground.
- Breaking Performance
  Special studless tread compound greatly improves braking performance in winter.


Size	LI&SR	Sidewall	Labelling	M+S	3PMSF	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
205/50R17	93H XL	BSW	E C 72	√	√	6½J	638	214	650	340
215/45R17	91H XL	BSW	E C 72	√	√	7J	626	213	615	340
215/50R17	91H	BSW	E C 72	√	√	7J	648	226	615	300
225/45R17	94V XL	BSW	E C 72	√	√	7½J	634	225	670	340
225/50R17	98H XL	BSW	E C 72	√	√	7J	658	233	750	340
225/55R17	101H XL	BSW	E C 72	√	√	7J	680	233	825	340
235/45R17	97V XL	BSW	E C 72	√	√	8J	644	236	730	340
235/55R17	103H XL	BSW	E C 72	√	√	7½J	690	245	875	340
255/45R17	102T XL	BSW	E C 73	√	√	8½J	662	255	850	340
215/55R18	95H	BSW	E C 72	√	√	7J	693	226	690	300
225/45R18	95V XL	BSW	E C 72	√	√	7½J	659	225	690	340
235/50R18	97H	BSW	E C 72	√	√	7½J	693	245	730	300
235/55R18	104W XL	BSW	E C 72	√	√	7½J	715	245	900	340
245/40R18	93H	BSW	E C 72	√	√	8½J	653	248	650	300
245/45R18	100V XL	BSW	E C 72	√	√	8J	677	243	800	340
255/55R18	109V XL	BSW	E C 73	√	√	8J	737	265	1030	340
235/50R19	99H	BSW	E C 72	√	√	7½J	719	245	775	300
235/55R19	105V XL	BSW	E C 72	√	√	7½J	741	245	925	340
255/45R19	100H	BSW	E C 72	√	√	81/2J	713	255	800	300
255/50R19	107V XL	BSW	E C 73	√	√	8J	739	265	975	340
255/55R19	107H	BSW	E C 72	√	√	8J	763	265	975	300
235/55R20	102H	BSW	E C 72	√	√	71/2J	766	245	850	300
255/45R20	105V XL	BSW	E C 73	√	√	8½J	738	255	925	340
255/50R20	109H XL	BSW	E C 72	√	√	8J	764	265	1030	340
255/55R20	107H	BSW	E C 72	√	√	8J	788	265	975	300
275/40R20	106V XL	BSW	E C 73	√	√	9½J	728	278	950	340
275/45R20	110V XL	BSW	E C 73	√	√	9J	756	273	1060	340
315/35R20	106T	BSW	E C 73	√	√	11J	728	320	950	300

Winter SUV Series

NEW

GM607





This studless winter SUV collection provides comfortable ride and higher safety performance in snowy conditions.

BENEFITS

- Central rib pattern and multi-siping design enable excellent braking and steering performance on snow/ice terrain.
- Wide tread design increases the contacting area with the ground, guaranteeing driving safety on snow/ice terrain.
- Combination of longitudinal and lateral grooves ensure the best water drainage performance.
- Excellent pitch arrangement and special tread compound disperse the noise and makes driving more comfortable.


Size	LI&SR	Sidewall	Labelling	3PMSF	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
235/75R15	109Q XL	BSW	E C 72	√	6½J	733	235	1030	340
215/65R16	98T	BSW	E C 72	√	6½J	686	221	750	300
215/70R16	100H	BSW	E C 72	√	6½J	708	221	800	300
235/70R16	106T	BSW	E C 72	√	7J	736	240	950	300
265/70R16	112T	BSW	E C 73	√	8J	778	272	1120	300
215/60R17	96T	BSW	E C 72	√	61/2J	690	221	710	300
225/60R17	99T	BSW	E C 72	√	6½J	702	228	775	300
225/65R17	102H	BSW	E C 72	√	6½J	724	228	850	300
235/65R17	108H XL	BSW	E C 72	√	7J	738	240	1000	340
265/65R17	112Q	BSW	E C 73	√	8J	776	272	1120	300
235/60R18	107H	BSW	E C 72	√	7J	739	240	975	340

Winter Studdable

NEW

GS601





This studdable winter performance collection provides strong and stable braking and handling performance on snowy and snowmelt road, minimising the danger of slipping.

BENEFITS

- Tread Pattern Design
  Perfect braking & grip power on snow/ice road conditions provided by directional pattern and studdable design.
- Super Braking Power
  6% widened tread design offers even landing area, improves braking and wear resistant performance on snow/ice terrain.
- Excellent Drainage Performance
  V-shaped groove design delivers perfect water drainage performance when snow melts, more stable driving terrain road conditions.

Size	LI&SR	Sidewall	Labelling	M+S	3PMSF	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
155/80R13	79T	BSW	E C 71	√	√	4½B	578	157	437	300
175/70R13	82T	BSW	E C 71	√	√	5B	576	177	475	300
165/60R14	75T	BSW	E C 71	√	√	5J	554	170	387	300
175/65R14	82T	BSW	E C 71	√	√	5J	584	177	475	300
175/70R14	84T	BSW	E C 71	√	√	5J	602	177	500	300
185/60R14	82T	BSW	E C 71	√	√	5½J	578	189	475	300
185/65R14	86T	BSW	E C 71	√	√	5½J	596	189	530	300
185/70R14	88T	BSW	E C 71	√	√	5½J	616	189	560	300
195/70R14	91T	BSW	E C 72	√	√	6J	630	201	615	300
185/60R15	84T	BSW	E C 71	√	√	5½J	603	189	500	300
185/65R15	88T	BSW	E C 71	√	√	5½J	621	189	560	300
195/55R15	85T	BSW	E C 72	√	√	6J	595	201	515	300
195/60R15	88T	BSW	E C 72	√	√	6J	615	201	560	300
195/65R15	91H	BSW	E C 72	√	√	6J	635	201	615	300
195/65R15	91T	BSW	E C 72	√	√	6J	635	201	615	300
205/60R15	91T	BSW	E C 72	√	√	6J	627	209	615	300
205/65R15	94T	BSW	E C 72	√	√	6J	647	209	670	300
205/70R15	96T	BSW	E C 72	√	√	6J	669	209	710	300
215/60R15	94T	BSW	E C 72	√	√	6½J	639	221	670	300
215/70R15	98T	BSW	E C 72	√	√	6½J	683	221	750	300
195/60R16	89T	BSW	E C 72	√	√	6J	640	201	580	300
205/55R16	91T	BSW	E C 72	√	√	6½J	632	214	615	300
205/60R16	92T	BSW	E C 72	√	√	6J	652	209	630	300
215/55R16	93T	BSW	E C 72	√	√	7J	642	226	650	300
215/60R16	95T	BSW	E C 72	√	√	6½J	664	221	690	300
215/65R16	98T	BSW	E C 72	√	√	6½J	686	221	750	300
225/50R16	92T	BSW	E C 72	√	√	7J	632	233	630	300
225/55R16	95T	BSW	E C 72	√	√	7J	654	233	690	300
225/60R16	98T	BSW	E C 72	√	√	6½J	676	228	750	300

All-Season Performance

GM701

BEST SELLER

ALL-WEATHER APPLICATION



ALL-SEASON

FEATURES

Performance

3PMSF-Rated


EU Label: E B 70-72

Wheel Diameter

13", 14", 15", 16", 17", 18"

Available Sizes

41



Innovative four-season passenger car tyre collection features high grip and noise reduction abilities, enabling comfortable ride with improved driving safety, side slipping prevention, strong adhesion performance and enhanced handling ability on snow road.

BENEFITS

- Streamlined lateral grooves improve drainage, handling and braking performance, ensures driving stability.
- Unique single directional V-shaped radial pattern design increases the ability of water breaking and elimination while reducing hydroplaning and preventing sideslip, effectively improving wet handling performance.
- High rigidity shoulder blocks are adjusted to reach more balanced grounding pressure to handle problem of swinging and eccentric for more stable driving.
- Increased sipes and optimised shoulder groove angle design ensure the heat dissipation performance along with good grip and traction, effectively reducing road noise generated during high-speed driving.

Size	LI&SR	Sidewall	Labelling	M+S	3PMSF	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
155/70R13	75T	BSW	E B 70	√	√	4½B	548	157	387	300
155/80R13	79T	BSW	E B 70	√	√	4½B	578	157	437	300
165/70R13	79T	BSW	E B 71	√	√	5B	562	170	437	300
175/70R13	82T	BSW	E B 70	√	√	5B	576	177	475	300
165/65R14	79T	BSW	E B 70	√	√	5J	570	170	437	300
175/65R14	82T	BSW	E B 70	√	√	5J	584	177	475	300
175/70R14	88T XL	BSW	E B 71	√	√	5J	602	177	560	340
185/60R14	82T	BSW	E B 70	√	√	5½J	578	189	475	300
185/65R14	86T	BSW	E B 70	√	√	5½J	596	189	530	300
185/55R15	82H	BSW	E B 70	√	√	6J	585	194	475	300
185/60R15	88H	BSW	E B 71	√	√	5½J	603	189	560	340
185/65R15	88H	BSW	E B 70	√	√	5½J	621	189	560	300
195/50R15	86H	BSW	E B 72	√	√	6J	577	201	530	340
195/55R15	85H	BSW	E B 71	√	√	6J	595	201	515	300
195/60R15	88H	BSW	E B 71	√	√	6J	615	201	560	300
195/65R15	91V	BSW	E B 71	√	√	6J	635	201	615	300
205/60R15	91H	BSW	E B 71	√	√	6J	627	209	615	300
205/65R15	94H	BSW	E B 71	√	√	6J	647	209	670	300



Size	LI&SR	Sidewall	Labelling	M+S	3PMSF	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
195/55R16	91H	BSW	E B 72	√	√	6J	620	201	615	340
205/55R16	94V	BSW	E B 72	√	√	6½J	632	214	670	340
205/60R16	96H	BSW	E B 72	√	√	6J	652	209	710	340
215/55R16	97V	BSW	E B 72	√	√	7J	642	226	730	340
215/60R16	99H	BSW	E B 72	√	√	6½J	664	221	690	300
215/65R16	98H	BSW	E B 71	√	√	6½J	686	221	750	300
215/70R16	104H XL	BSW	E B 72	√	√	6½J	708	221	900	340
225/55R16	95H	BSW	E B 71	√	√	7J	654	233	690	300
225/60R16	98H	BSW	E B 71	√	√	6½J	676	228	750	300
205/50R17	93V	BSW	E B 72	√	√	6½J	638	214	650	340
205/55R17	95V XL	BSW	E B 72	√	√	6½J	658	214	690	340
215/55R17	98H XL	BSW	E B 72	√	√	7J	668	226	750	340
215/60R17	96H	BSW	E B 71	√	√	6½J	690	221	710	300
225/45ZR17	94W XL	BSW	E B 72	√	√	7½J	634	225	670	300
225/50R17	98V	BSW	E B 72	√	√	7J	658	233	750	340
225/55R17	101H XL	BSW	E B 72	√	√	7J	680	233	825	340
225/60R17	99V	BSW	E B 71	√	√	6½J	702	228	775	300
225/65R17	102H	BSW	E B 71	√	√	6½J	724	228	850	300
235/55R17	103H	BSW	E B 72	√	√	7½J	690	245	875	340
245/65R17	107T	BSW	E B 71	√	√	7J	750	248	975	300
235/50R18	101V XL	BSW	E B 72	√	√	7½J	693	245	825	340
235/60R18	107H	BSW	E B 72	√	√	7J	739	240	975	340
275/65R18	116T	BSW	E B 72	√	√	8J	815	279	1250	300


All-Season Commercial

GM702

NEW

ALL-WEATHER APPLICATION





Innovative four-season commercial van tyre collection features strong traction performance, easy control and strong self-cleaning ability.

BENEFITS

- Three stepped longitudinal main grooves ensure excellent drainage performance and firm grip on wet and dry roads.
- Unique high-density sipes and zigzag traversal pattern on tread edge enable good heat dissipation of the block with great grip and traction.
- Acute angle patterns on shoulder and wide shoulder blocks enhance robustness, durability and load capacity, improving steering performance.
- Open shoulder grooves are designed to provide excellent self-cleaning capability and outstanding traction.

Size	LI&SR	Sidewall	Labelling	M+S	3PMSF	Std. Rim	O.D. (mm)	S.W. (mm)	Max Load (kg)	Max Air (kpa)
195/70R15C	104/101R	BSW	E B 72	√	√	6J	655	201	900/825	550
215/65R15C	107/103R	BSW	E B 72	√	√	6½J	661	221	875/875	550
215/70R15C	109/107R	BSW	E B 72	√	√	6½J	683	221	1030/975	450
225/70R15C	112/109R	BSW	E B 72	√	√	6½J	697	228	1120/1030	550
195/75R16C	107/105R	BSW	E B 72	√	√	5½J	698	196	975/925	450
205/65R16C	107/105T	BSW	E B 72	√	√	6J	672	209	975/925	450
215/75R16C	113/111R	BSW	E B 72	√	√	6J	728	216	1150/1090	450
225/65R16C	111/108R	BSW	E B 72	√	√	6½J	698	228	1090/1000	550
235/65R16C	115/113R	BSW	E B 72	√	√	7J	712	240	1215/1150	450